
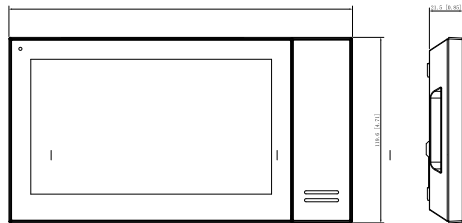


Intercom IP

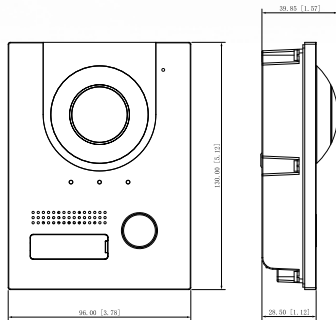

IP Villa Door Station

- 2MP CMOS camera
- Mechanical button
- Night vision & voice indicator
- 160° angle of view
- Group call
- Aluminium alloy plate
- IP55&IK07
- Surface mounted and flush mounted
- Support standard PoE

IP Indoor Monitor

- IPC surveillance
- Alarm integration
- High performance
- Embedded 8GB SD card
- Support standard PoE

Technical Specification

Model	DHI-VTO2402F-B
-------	----------------

System Parameter

Host Processor	Embedded processor
Camera	CMOS Low Illumination 2MP HD Colorful
Angle of View	H:160°
Focal Length	2 mm
WDR	Support
Noise Reduction	Noise suppression and echo cancellation
Video Encoding	H.264
Frame Rate	PAL:25 fps
Audio Encoding	G.711 U
Video Bit Rate	256 K to 2 M
Light Compensation	IR Supplement

Port

RS-485 Port	1
Alarm Output/Input	1/1
Lock Control	1 set
Door Status Detection	1 set
Eoc	1 set
Exit Button	1
Tamper Switch	1 set
Network Interface	1
Power Output	12V/100mA